

# Expanded Metal



## Stock Table

### EXPAMET STAINLESS STEEL MESH




Ref	Pattern	Sheet Size	LW x SW x Thickness mm
		420 X 10M	
MXS927s	926S	420x10M COIL	3.180 X 1.81 X 1.5 mm

### INSECT MESH - ARCHITECTURAL - FLITRATION - LOUVRE DOORS - SECURITY

### EXPAMET STEEL WALKWAY MESH

Pattern	Sheet Size	LW x SW x Thickness mm
WK2496	915 X 2290MM	60.96 x 25.40x4.5 mm
WK2496	1220 X 2440MM	60.96 x 25.40x4.5 mm
WK2496	1524 X 1830MM	60.96 x 25.40x4.5 mm
WK4896	610 X 3048	121.92 x 33.87 x 4.5 mm
WK4896	610 X 3660MM	121.92 x 33.87 x 4.5 mm
WK4896	610 X 1980MM	121.92 x 33.87 x 4.5 mm
WK4896	915 X 1620MM	121.92 x 33.87 x 4.5 mm
WK4896	1830 X 1830MM	121.92 x 33.87 x 4.5 mm
WK4898	2440 X 1220MM	121.92 x 35.86 x 6.0 mm
WK4898	3050MM X 1525MM	121.92 x 35.86 x 6.0 mm

**Gripwalk and Supagrip Anti Slip Walkways Available please enquire**

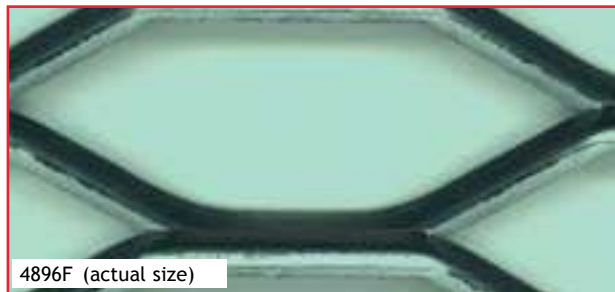

### EXPAMET ALUMINIUM MESH

Pattern	Sheet Size	LW x SW x Thickness mm
901A	ROLL 610 X 10M	3.18 X 1.81 X 0.32
351A	SHEET 1220 X 915MM	10.236 X 5.64 X 1.90
351AG	SHEET 1220 X 610MM	GOLD ANODISED
351AG	SHEET 1220 X 915MM	GOLD ANODISED
1294A	SHEET 2440 X 1220MM	30.48 X 11.72 X 1.60

### EXPAMET STEEL MESH - FLAT

Pattern	Sheet Size	LW x SW x Thickness mm
217F	1220 X 2440MM	6.85 X 3.56 X 0.89
0794F	1250 X 2500MM	14.22 X 4.83 X 0.90

Available in Mild Steel, Galvanised, Stainless & Aluminium.

1279F	2440 X 1220MM	23.11 X 5.84 X 1.50
1280F	2440 X 1220MM	24.38 X 7.11 X 1.14
1578F	1220 X 2440MM	28.00 X 9.00 X 2.79
1584F	2440 X 1220MM	32.77 X 10.92 X 1.47
1585F	2440 X 1220MM	33.53 X 12.45 X 1.14
2073F	2440 x 1220mm	42.93 x 14.22 x 2.69
2074F	1220 X 2440MM	39.12 X 18.29 X 2.74
2076F	2440 x 1220mm	43.43 x 18.03 x 2.31
2077F	2440 X 1220MM	43.18 X 17.27 X 1.42
3393F	2440 X 1220MM	77.47 X 27.18 X 2.82

### EXPAMET CONVENTIONAL MESH

Available in S/Steel, Aluminium, Mild Steel & Galvanised, Brass & Copper

Pattern	Sheet Size	LW x SW x Thickness mm
1196	2440 X 1220MM	28.575 X 9.52 X 1.20
1595	2440 X 1220MM	38.10 X 16.93 X 1.575
2089	2440 X 1220MM	50.80 X 22.58 X 3.00
2091	2440 X 1220MM	50.80 X 22.58 X 2.50
	1250 X 1250MM	5.482 X 3.5 X 0.6
3092	2440 X 1220MM	76.20 X 33.87 X 3.00
3396	2440 X 1220MM	85.725 X 40.64 X 3.00
3398	2440 X 1220MM	85.725 X 39.33 X 2.50
	1220 X 610MM	28.52 X 4 X 0.72
4097	2440 X 1220MM	101.60 X 50.80 X 3.00

# Specialist Patterns & Architectural Expanded



## Finishes

Galvanised coatings for low maintenance and powder coating for vibrant aesthetics.

## Materials

Expanded metal mesh is available in a range of materials including Mild Steel, Stainless Pre-galvanised Steel, Aluminium, Copper, Pre and Post Patinated Copper, Brass, PVC, Titanium etc.



## Added Value

Meshes can be shaped and sheared to fit project requirements. Complete panels for Balustrades and infill panels can be manufactured.

Visit Our Web Site to access our hugh range of Stocked Patterns [www.metalmesh.biz](http://www.metalmesh.biz)



## We Expand Specialist Materials

- Brass
- Copper
- PVC
- Titanium
- Precious Metals

# Edging Section

Ref No.	Size mm	Thick mm	Gap mm	Weight kg/m	Standard Length mm
UF1	6.35	1.2	1.78	0.13	2490
UF2	6.35	0.55	1.78	0.07	1905
UF3	12.7	0.9	1.78	0.18	2540
UF4	19.05	1.2	5.08	0.38	3810
UF5	31.48	1.2	1.78	0.62	3810
Suitable for framing flattened Expamet up to and including 1.58mm					
UF6	12.7	0.9	3.3	0.2	2540
UF7	19.05	1.2	3.3	0.38	3810
UF8	31.75	1.2	3.3	0.62	3810
Suitable for framing flattened Expamet up to and including 3.18mm					
UF9	19.05	1.2	5.08	0.38	3810
UF10	31.75	1.2	5.08	0.62	3810
Suitable for framing conventional type Expamet expanded steel with strand widths of 2.39mm or under					
UF11	19.05	1.5	10.16	0.45	3810
UF12	25.4	1.5	10.16	0.63	3810
UF13	25.4	25.4	25.4	25.4	3810
UF14	38.1	38.1	38.1	38.1	3810
UF15	38.1	38.1	38.1	38.1	3810
UF11	UF12	UF13	UF14	UF15	
Suitable for framing conventional type Expamet expanded steel with strand widths of 4.75mm or under					
UF16	14.29	1.5	12.7	0.46	3810
Suitable for framing conventional type Expamet expanded steel with strand widths of 6.09mm or under.					
UF18	19.05	1.2	6.5	0.42	3810
UF19	31.75	1.2	6.5	0.66	3810
Suitable for framing 10g (3mm) and 12g (2.5mm) diameter welded mesh and expanded metal with strand widths up to 3.2mm. All dimensions given in mm					