


Span 300 Stairway

ACCESS TOWER SYSTEM



RIDGEWAY

Key Features

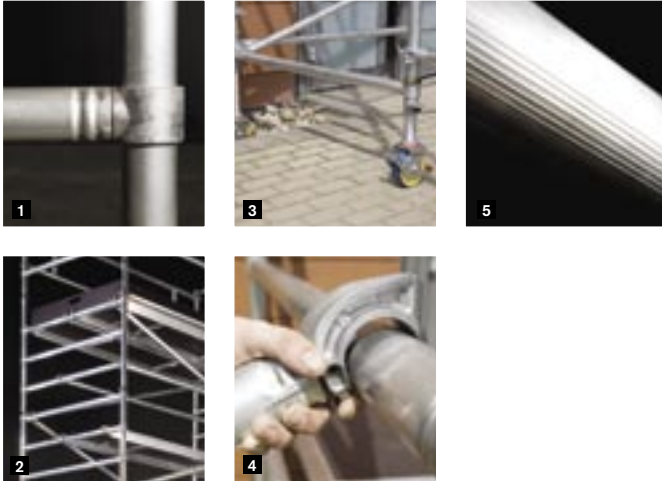

1. Rib-Grip – cold formed joints

The cold-formed Rib-Grip jointing process is a key feature of the Instant tower system and provides three times the strength and durability of traditional welded joints. 10 year no question warranty!

2. Span 300 Frame – reversible multi-purpose frames

High-strength lightweight alloy construction makes components easier to handle. The Span 300 frame is fully interchangeable with all existing parts and means fewer components to stock and control.

3. Adjustable Leg

A choice of 400mm, 600mm & 800mm height adjustment is provided by Quick-Adjust legs. This provides quick and easy levelling on rough or uneven surfaces. Once loaded they cannot be accidentally released.

4. Automatic locking Brace Hooks & Heavy 'Rhino-nose'

Hooks snap into locked position without prior 'priming' and an easy-release catch design aids disassembly. The large contact area (over 225°) gives a firm grip. The Rhino-nose is very durable for arduous site conditions resisting damage if dropped.

5. Fluted frame rungs

Provides better grip and increased slip resistance when climbing frames during assembly or once erected.



Belfast:
103 Airport Road West
Belfast
Co. Down
BT3 9ED
Tel: +44 (0) 28 90454590

Ashbourne:
Unit 1&2 Greene Park
Ratoath Road
Ashbourne
Co. Meath
A84 XD98
Tel: +353 (01) 802 71 73

E: info@ridgeway-online.com
W: www.ridgeway-online.com

For safe use and assembly please refer to manufacturer's assembly guide.
Specifications are subject to change without notice.
The photographs in this brochure are for promotional purposes only.




The NEW Span 300 Stairway tower provides a safe stairway for mobile access towers with landings every 2m of height. It is lightweight, fast and easy to assemble with rung spacing of 297mm.

Stairway steps are 145mm deep, with a clear width of 400mm. The step rise is 237mm and the angle of inclination is 51 degrees. At the top level platform, an additional inside guardrail is fitted to the platform to guard the stairwell. Span 300 features the unique high strength Rib-Grip jointing system, guaranteed for 10 years.



All standard components have an extended 3 year warranty.

Compliant with EN1004 and Work at Height Directives.
Load Class 3.

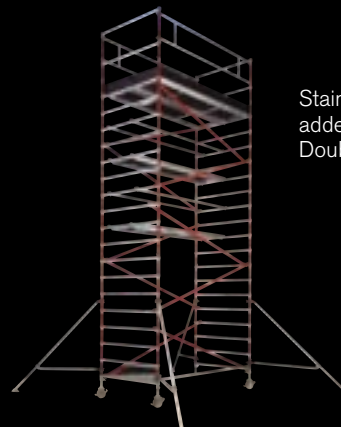

Stairway system components can be added as accessories into a standard Double Width Span 300 tower.

MANUFACTURED BY

INSTANT UPRIGHT

www.instantupright.com