



**RIDGEWAY**

# Snappy

LOW LEVEL ACCESS TOWER SYSTEM



# Snappy

## LOW LEVEL ACCESS TOWER SYSTEM

The Snappy range which includes Snappy 300, Snappy 400 and the NEW Snappy Ladder are lightweight, heavy duty work platforms which fold out and assemble in seconds. Highly versatile, they can be combined with Instant Span Tower Systems to gain working heights up to 4m. Used by many different trade types such as decorators, electricians, heating and ventilating contractors and sign-writers, Snappy provides a robust work platform which can be transported in a small van.

The simplicity of the design reduces the risk of incorrect assembly or the loss of components. Snappy features the unique high strength Rib-Grip jointing system, guaranteed for 10 years.



All standard components have an extended 3 year warranty.

Compliant with EN1004 and  
Work at Height Directives.  
Load Class 3.




# RIDGEWAY

# Key Features



**1. Rib-Grip – cold formed joints**  
The cold-formed Rib-Grip jointing process is a key feature of the Instant tower systems and provides three times the strength and durability of traditional welded types. 10 year no question warranty!

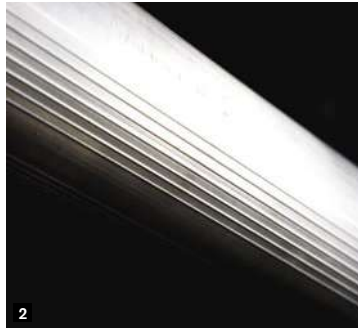

**2. Fluted frame rungs for better grip**  
Provides increases slip resistance when climbing frames during assembly or once erected.



**3. TX2000 Platforms**  
The TX2000 lightweight platform available in standard and trapdoor provides all-round edge protection. All components can be easily replaced should damage occur.



**Compact Dimensions**  
Snappy is compact to store and can be transported in a small van.



**Simply Snappy**  
Snappy simply snaps out and is ready to use in seconds.



**4m Snappy**  
Snappy can be extended to form a complete tower with a maximum platform height of 4m.



**New Snappy Ladder**  
Features integral ladder access and available in three platform heights.

**Snappy 400**  
With 400mm rung spacing this product is available for distribution outside the EU.





# Snappy Ladder

The NEW Snappy Ladder is a lightweight, high strength low level access platform with integral ladders. Available in low level and 2m platform heights and up to 4m when combined with Span Tower components.

Compliant with Work at Height Directive.

SPECIFICATIONS	Snappy 300	Snappy 400*	Snappy Ladder
Max. Working Height	4.0m	4.0m	4.0m
Overall Height	1.98m	1.98m	1.99m
Width	0.74m	0.74m	0.74m
Length	2.0m	2.0m	2.0m
Weight	44kg	41kg	41kg
Rung Spacing	276mm	414mm	500mm*

Fit guardrails in accordance with assembly guide

\*Snappy 400 is available for distribution outside EU only.

\*Snappy Ladder - 250mm integral ladder rung spacing.



Belfast:  
103 Airport Road West  
Belfast  
Co. Down  
BT3 9ED  
Tel: +44 (0) 28 90 454599

Ashbourne:  
Unit 1 & 2 Greene Park  
Rotoath Road  
Ashbourne  
Co. Meath  
A84 XD98  
Tel: +353 (01) 802 7173

Email: [info@ridgeway-online.com](mailto:info@ridgeway-online.com)  
Web: [www.ridgeway-online.com](http://www.ridgeway-online.com)

For safe use and assembly please refer to manufacturer's assembly guide.  
Specifications are subject to change without notice.  
The photographs in this brochure are for promotional purposes only.

A wide range of Span Tower Systems and accessories are available from Instant.

Span Range



Painted Tower



Spandeck Walkway



Snap-Out Boiler System



Aviation



A wide range of components are available



MANUFACTURED BY

**INSTANT UPRIGHT**

[www.instantupright.com](http://www.instantupright.com)