

## Palisade D Section

### REFER ITEM MARKED

1. Anti-vandal BOLT [Permacone]
2. Top Rail - 50 x 50 x 6 mm. R.S. Angle to which pales are bolted using Anti-vandal fixings.
3. W "Pale"-Cold rolled and pierced to receive the Anti-vandal fixings.
4. Standard fence posts-100 x 50.R.S. Joist slotted top and bottom to meet the fish plate connectors
5. Bottom rail - Connected at post similar to the top rail.
6. Anti-vandal BOLT [Shear Nut]
7. Anti-Sag support leg
8. Concrete foundation


THE ABOVE DRAWING SHOWS A TYPICAL LAYOUT.  
INSTALLERS SHOULD REFER TO BS722 PART 12:1999 FOR FURTHER DETAILS.

Secure Pale with  
Anti-vandal fixings

Position Top Rail over  
Fishplate and secure with  
Anti-vandal fixings

Standard Fence Post

fixings

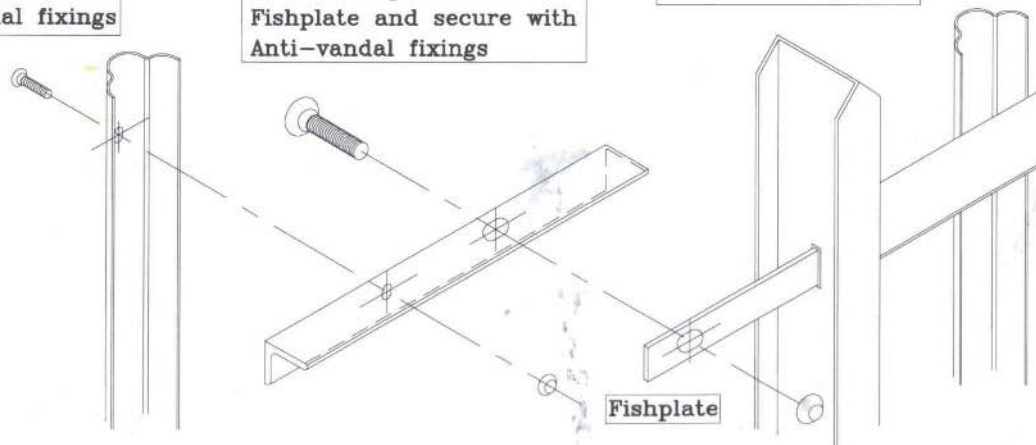

GENERAL FIXING ARRANGEMENT



Ridgeway  
103 Airport Road West  
Belfast  
BT3 9ED

Tel: 028 9045 4599

Fax: 028 9045 4596

Web: [www.ridgeway-online.com](http://www.ridgeway-online.com)

E-mail: [info@ridgeway-online.com](mailto:info@ridgeway-online.com)